

## FANCOIL MURAL


MODELO **KFCI-A-SP** **NOVEDAD 2022**

R05BGE



CARACTERÍSTICAS		KFCI-A-250SP 2T	KFCI-A-400SP 2T	KFCI-A-600SP 2T
CAPACIDAD FRIGORÍFICA 7/12 (L-M-H)	KW	2,39/2,59/2,7	2,88/3,3/3,81	3,79/4,26/4,87
	Frig/h	2.403	3.277	4.188
CAPACIDAD CALORÍFICA 50/40 (L-M-H)	KW	2,63/3.03/3,29	3,77/4,33/5,08	4,77/5,57/6,31
	Frig/h	2.829	4.369	5.427
MOTOR VENTILADOR				
CAUDAL AIRE (L-M-H)	m³/h	400/454/492	590/689/825	717/849/979
ALIMENTACIÓN	V-ph-Hz	220/240-1-50		
TIPO		1xDC		
VELOCIDADES	Nº	3	3	3
POTENCIA ABSORBIDA MÁXIMA (H)	W	13	34	38
CORRIENTE FUNCIONAMIENTO	A	0,16	0,28	0,39
NIVEL PRESIÓN SONORA (L-M-H)	dB(A)	27/30/32	35/39/45	35/40/44
INSTALACIÓN				
CONEXIONADO TUBO AGUA	Pulgadas	3/4	3/4	3/4
PÉRDIDA CARGA BAT. AGUA FRIA (H)	kPa	31,61	56,75	50,68
CAUDAL AGUA	L/H	510	730	890
CONEXIÓN DIÁMETRO DESAGÜE	mm	20	20	20
BOMBA DE CONDENSADOS		No	No	No
DIMENSIONES				
PROFUNDO	mm	233	233	237
ALTO	mm	290	290	315
ANCHO	mm	915	915	1.072
PESO NETO	Kg	12,7	12,7	14,9
CÓDIGO		0190040112	0190040114	0190040116

## DIMENSIONES DE LA UNIDAD

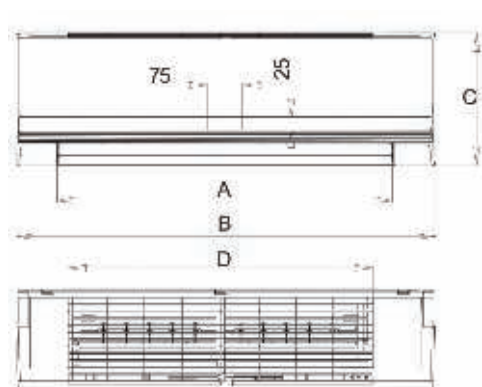

Modelo	A	B	C	D	E
KFCI-A-250SP 2T (400)	732	915	290	663	233
KFCI-A-600SP 2T	892	1.072	315	813	237